


PICK-A-POINT CONTROL ROOM SOLUTION

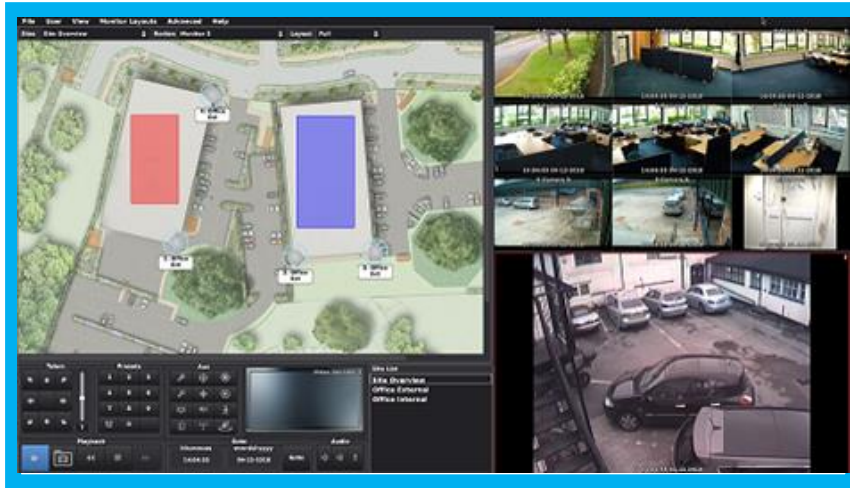

Pick-A-Point offers exceptional versatility, offering the ability to seamlessly manage alarm handling, remote viewing and remote resource management from single or multiple sites, system diagnostics, camera pre-sets and sophisticated event tracking. For the user, this versatility translates into cost-efficiencies and exceptional return on investment.

WHY NETVU?

- ✓ NetVu Connected™ streaming protocols ensure no loss of video evidence.
- ✓ Video Partition (PAR) File™ format for multi-camera synchronised playback and long storage media life.
- ✓ Closed IP™ hardened management layer provides the highest levels of cyber security.
- ✓ MultiMode™ recording reduces storage needs while maintaining very high recording quality.
- ✓ Simple data capture, recording and presentation from EPOS, Electronic Access Control and Building Management Systems, coherently displayed with video pictures.
- ✓ NetVu PowerScripts™ for quick and easy integration and customised applications.
- ✓ Cloud-based configuration and remote support available.


KEY FEATURES

- Drillable map structure, giving a highly user-friendly graphical management system that can easily control many sites and locations.
- Multiple simultaneous screen layouts selected by tab.
- Advanced Activity and Event Search.
- Supports 360° cameras with image de-warping, stored preset positions and multiple concurrent views from the same camera.
- User Playlists for simplified video evidence production.
- User-definable dial, graph, gauge and virtual LED display plugins for side-by-side coherent display of video and data.
- Able to select and control cameras with the standard USB telemetry keyboard.
- Dedicated SiteBuilder software for configuring your system.

Pick-A-Point System Specification	
1x System Unit with VESA mounting	Dedicated Fan-less workstation without operating system.
1x Primary 22" Widescreen HDMI monitor	Primary Monitor for displaying maps, video, etc.
1x HDMI-to-HDMI video cable	To connect primary monitor to workstation.
1x Optional Second 22" Widescreen HDMI monitor	Secondary Optional Monitor for displaying video, etc.
1x Optional Display Port-to-HDMI video cable	To connect secondary monitor to workstation.
1x USB QWERTY keyboard	For data entry on Pick-A-Point.
1x USB Mouse	For interaction with Pick-A-Point.

1x Dedicated Micros USB Telemetry keyboard	For telemetry control by Pick-A-Point.
General Specifications	
Power	9 to 19VDC. 5A. 60W power supply included.
Operating Temperature	Operating: -20C to 60C. (-4°F to 140°F).
Operating Humidity	0% to 90% Relative Humidity (Non-Condensing).
Approvals	CE marked. Complies with part 15 of FCC CFR47. RoHS Compliant.
Product Dimensions	196mm x 213mm x 41mm (7 11/16" x 8 3/8" x 1 5/8").
Warranty	1 year, plus additional 1 year free when the product is registered

TECHNICAL DRAWING

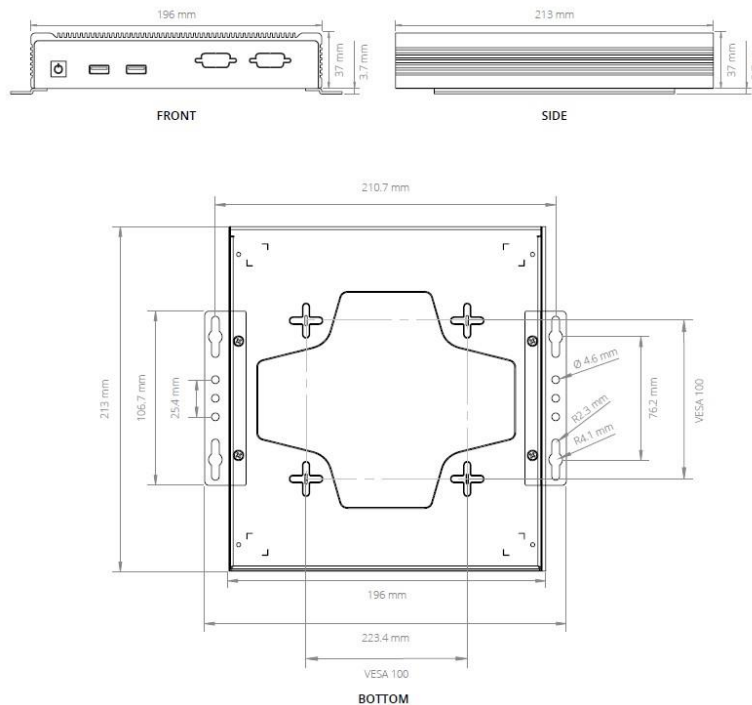

PART NUMBERS

PPW03

→ PICK-A-POINT SYSTEM

Version 1.0 © Copyright NetVu Limited. 02/04/2020. Design and specification subject to change without notice. E. and O.E.

VMS/DAT/003/A